

Blohm + Voss Oil Tools Pipe Handling Equipment Elevator Links

B+V has the largest range of elevator links for meeting the operational requirements of the customer.

- Forged in accordance with API 8C
- PSL 1 or PSL 2
- 100% MPI inspected
- Proof load tested up to 1.5x rated capacity
- Available for low temperature
- Specifically designed eye shapes upon request
- Tie Rods for top drives
- 90° twisted eyes





150 ton Elevator Links

Part No.	Size	Rated Capacity	Weight
134 048-Y	1.3/4" x 48"	150 tons	154 KG (340 lbs)
	12" increases	150 tons	18 KG (40 lbs)
134 144-Y	1.3/4" x 144"	150 tons	298 KG (655 lbs)

250 ton Elevator Links

Part No.	Size	Rated Capacity	Weight
214 048-Y	2.1/4" x 48"	250 tons	180 KG (396 lbs)
	12" increases	250 tons	23 KG (51 lbs)
214 180-Y	2.1/4" x 180"	250 tons	433 KG (953 lbs)
214 240-Y	2.1/4" x 240" (20 ft.)	250 tons	544 KG (1199 lbs)
214 360-Y	2.1/4" x 360" (30 ft.)	250 tons	780 KG (1720 lbs)
214 480-Y	2.1/4" x 480" (40 ft.)	250 tons	1000 KG (2205 lbs)

350 ton Elevator Links

Part No.	Size	Rated Capacity	Weight
234 048-Y	2.3/4" x 48"	350 tons	270 KG (595 lbs)
	12" increases	350 tons	29 KG (64 lbs)
234 216-Y	2.3/4" x 216"	350 tons	734 KG (1618 lbs)
234 240-Y	2.3/4" x 240" (25 ft.)	350 tons	790 KG (1742 lbs)
	60" (5 ft.) increases	350 tons	145 KG (320 lbs)
234 600-Y	2.3/4" x 600" (50 ft.)	350 tons	1766 KG (3894 lbs)

500 ton Elevator Links

Part No.	Size	Rated Capacity	Weight
312 072-Y	3.1/2" x 72"	500 tons	478 KG (1050 lbs)
	12" increases	500 tons	52 KG (115 lbs)
312 216-Y	3.1/2" x 216"	500 tons	1102 KG (2425 lbs)
312 240-Y	3.1/2" x 240" (20 ft.)	500 tons	1200 KG (2645 lbs)
	60" (5 ft.) increases	500 tons	260 KG (575 lbs)
312 660-Y	3.1/2" x 660" (55 ft.)	500 tons	3236 KG (7135 lbs)

750 ton Elevator Links

Part No.	Size	Rated Capacity	Weight
434 108-Y	4.3/4" x 108"	750 tons	1030 KG (2265 lbs)
	12" increases	750 tons	76 KG (170 lbs)
434 216-Y	4.3/4" x 216"	750 tons	1714 KG (3770 lbs)
434 240-Y	4.3/4" x 240" (20 ft.)	750 tons	1862 KG (4105 lbs)
	60" (5 ft.) increases	750 tons	380 KG (828 lbs)
434 660-Y	4.3/4" x 660" (55 ft.)	750 tons	4514 KG (9952 lbs)

1000 ton Elevator Links

Part No.	Size	Rated Capacity	Weight
512 180-Y	5.1/2" x 180"	1000 tons	2630 KG (5800 lbs)

other sizes upon request

1380 ton Elevator Links

Part No.	Size	Rated Capacity	Weight
612 180-Y	6.1/2" x 180"	1380 tons	3580 (7876 lbs)

other sizes upon request

Dimensions


sh tons	Size	x	a	b	c	d	e	f	g
150	1.3/4"	2.5/32"	4.11/16"	5.1/2"	2.31/32"	5.3/16"	13.3/16"	3.5/8"	11.3/16"
250	2.1/4"	2.7/16"	5.1/2"	7.31/32"	3"	8"	10.9/32"	5"	14.3/16"
350	2.3/4"	2.3/4"	5.21/32"	8.1/2"	3.3/4"	9.1/2"	11.13/16"	5.5/16"	15.3/4"
500	3.1/2"	3.11/18"	6.3/4"	10.3/16"	4.19/32"	9.1/2"	12"	6.1/8"	17.1/5"
750	4.3/4"	4.3/4"	10"	15.3/16"	5.1/2"	10"	15.3/16"	2.1/4"	19.1/2"
1000	5.1/2"	8.3/16"	12.1/2"	17.1/2"	5.29/32"	12.1/2"	17.1/2"	8.3/16"	25.1/2"
1380	6.1/2"	13.25/32"	11.1/2"	25.7/16"	6.7/16"	11.1/2"	25.7/16"	13.25/32"	29.7/32"

for 1.3/4"

for 2.1/4"-3.1/2"

for 4.3/4"-5.1/2"

for 6.1/2"

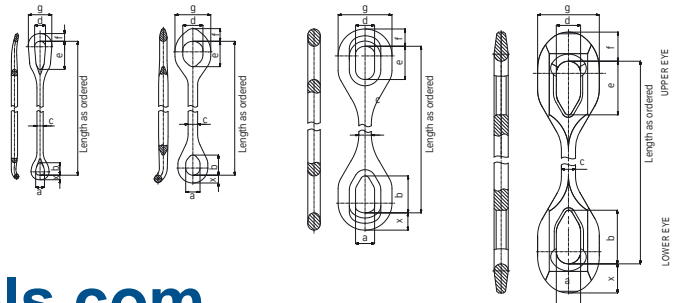

www.blohm-voss-oiltools.com

Production and Service

Production and Service

Stocking and Service

Stocking and Service



Head Office
Hamburg/Germany

Blohm + Voss Oil Tools GmbH
Hermann-Blohm-Straße 2
20457 Hamburg, Germany
Phone: +49-40-3119-1963
+49-40-3119-1162
Fax: +49-40-3119-3440
E-mail:
oiltools@blohm-voss.com
www.blohm-voss-oiltools.com

Houston, Texas/USA

Blohm + Voss Oil Tools, LLC
11355 FM 830
Willis
Texas 77318
United States of America
Phone: +1-936-856-4995
Fax: +1-936-856-7487
E-mail:
bvot@blohm-voss.com

Singapore/Republic
of Singapore

Premier Sea & Land Pte Ltd
54 Loyang Way
Singapore 508 747
Republic of Singapore
Phone: +65-6543-1433
Fax: +65-6543-1219
E-mail:
enquiries@mtqpremier.com.sg

Sharjah
United Arab Emirates

Hi-Energy Service
Hamriyah Free Zone,
Sharjah, UAE
Phone: +971-55-2308-252
Fax: +971-4-2980-862
E-mail:
bdm@hi-energy-services.com



Version: 09 / 01, 2011
Dimensions and data subject to change
without any notice.
Copyright © 2009 by B+V Oil Tool Division