


## AOT TYPE "T" SAFETY CLAMP

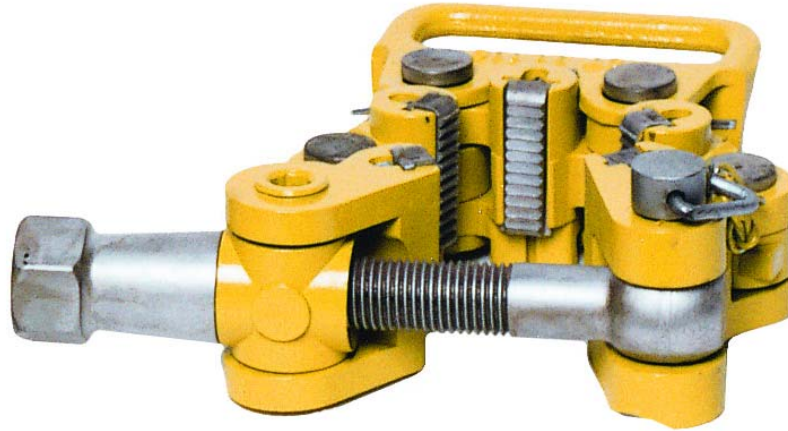

The AOT Type "T" Safety Clamp is designed for small diameter pipe 1 1/8" - 4 1/2" O.D. Each link changes the effective working range approximately 1" in diameter. For sizes larger than 4 1/2" O.D., the Type "C" Safety Clamp should be used.

The same positive automatic gripping principle is used as in the Type "C" Safety Clamp. It is ideal to help safeguard against dropping strings of flush joint tubing, to provide a shoulder to position strings of flush line pipe for welding, and many other

### SAFETY CLAMP ASSEMBLIES COMPLETE - TYPE "T"

AOT #	RANGE O.D. SIZE	REFERENCE	#LINK REQ'D	WT.
11-125	1 1/8" - 2"	7624-5103	4	36.00
11-126	2 1/8" - 3 1/4"	7624-5104	5	40.00
11-127	3 1/2" - 4 1/2"	7624-5105	6	44.00

ADD -B TO END OF PART NUMBER TO INCLUDE BOX

---



---




---



---

## REPLACEMENT PARTS FOR TYPE "T" SAFETY CLAMP

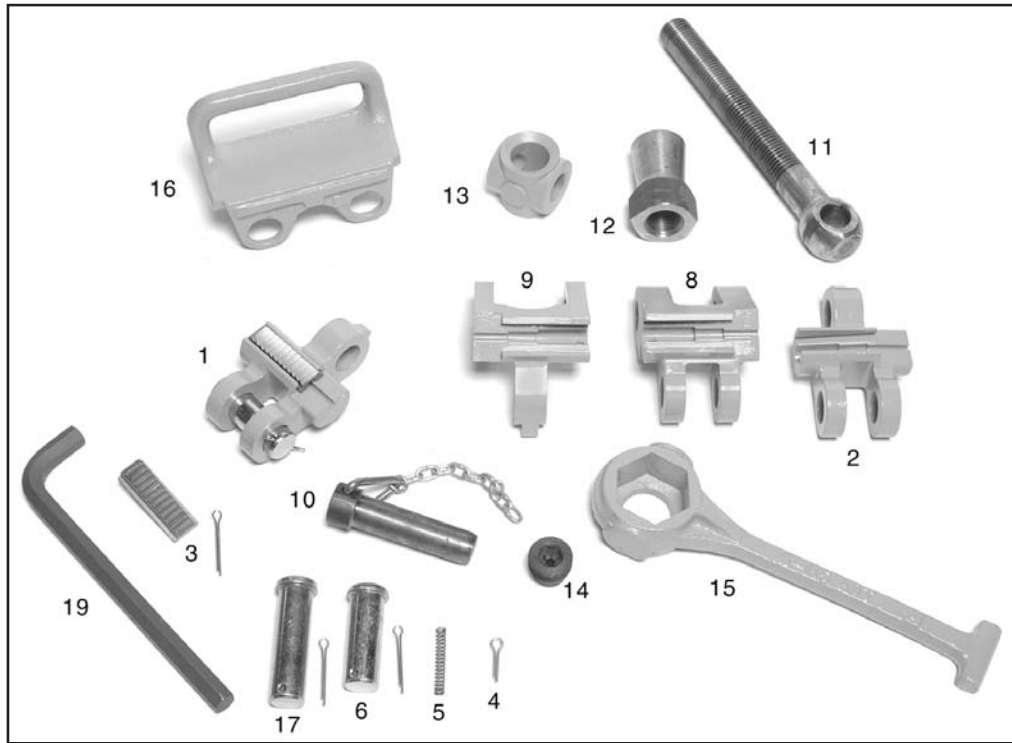

AOT #	ITEM	DESCRIPTION	REFERENCE #	** SPARES	WT.
11-101	1	LINK ASSY. COMPLETE	7624-B-7		4.25
11-102	2	LINK INTERMEDIATE	7624-A-18	3	3.25
11-103	3	INSERT w/COTTER	7624-A-21	6	.25
11-104	4	COTTER f/INSERT	900620-52		.06
11-105	5	SPRING f/INSERT	7624-B-21	6	.06
11-106	6	LINK PIN w/COTTER	7624-C-5	3	.75
11-107	7	COTTER f/LINK PIN	900620-36		.06
11-108	8	END LINK (SCREW)	7624-A-20		4.50
11-109	9	END LINK (PIVOT BLOCK)	7624-A-19		3.50
11-110	10	END LINK PIN w/CHAIN	7624-F-5	1	1.25
11-111	11	SCREW	7624-A-5		4.00
11-112	12	NUT	7624-B-5		1.50
11-113	13	PIVOT BLOCK	7624-A-5000		1.50
11-114	14	PIVOT BLOCK PIN	7624-D-5		.25
11-115	15	NUT WRENCH	7624-A-25		4.00
11-116	16	HANDLE (CAST STEEL)	7624-A-22		3.00
11-117	17	HANDLE LINK PIN w/COTTER	7624-G-5		.75
11-118	18	HANDLE KIT	7624-A-5138		4.00
11-119	19	PIVOT BLOCK PIN WRENCH	900533-12		.12
11-120	N/P	SAFETY CLAMP BOX	7624-A-9		45.00
11-121	N/P	1 YEAR SPARE PARTS KIT	N/A	1	13.00

ALL PARTS ARE INTERCHANGEABLE WITH BAASH-ROSS® TYPE "T" SAFETY CLAMPS  
 \*\* RECOMMENDED SPARE PARTS FOR 1 YEARS SERVICE